

SC-ISOCON3

3 Port Isolating Signal Converter



The new SC-ISOCON3 Isolating Signal Converter can accept a wide range of inputs including 4-20mA, thermocouple, RTD and voltage signals. The units produce a high level DC output of either voltage or current.

Full 3 port isolation is standard as is an isolated transmitter supply which can be used to power any standard 2-wire 4-20mA transmitter.

The input type and range can be user selected using simple DIL switches inside the unit. All RTD and Thermocouple inputs can be fully linearised.

Non-interactive zero and span controls make adjustment of the unit quick and simple.

Other features include optional inversion of the input signal and optional second analogue output (see SC-Dualcon data sheet).

The unit can accept a wide ranging ac power supply from 90 to 264 Vac.

For specials such as custom linearisation, frequency input and maths functions etc please contact the sales office.

Connection Details

1. Power supply -ve
2. Power supply +ve
4. Process Input -ve T/C -ve RTD -ve
5. Process Input +ve T/C +ve RTD +ve
3. Trans supply +ve RTD 4th wire
6. T/C Shield RTD 3rd wire
10. Output -ve
12. Output +ve

Cynergy3 Components Ltd.
7 Cobham Road
Ferndown Industrial Estate
Wimborne, Dorset BH21 7PE
Telephone +44 (0) 1202 897969
Email:sales@cynergy3.com

ISO9001 CERTIFIED
SC-ISOCON3 2017

- Universal input/output- user selectable
- mA, Voltage, Thermocouple & RTD inputs
- Dual Output unit available see Dualcon
- Selectable mA or Voltage output
- Wide range AC Supply
- Isolated Transmitter Supply
- Very High Accuracy, Low Cost
- Only 12.5mm Wide on DIN rail

Inputs

DC/AC Current & Voltage
0-20mA, 4-20mA, 0-10mA into 15
0-1V, 0-10V, 1-5V into 1M
Min & Max Full Scale Ranges are:

DC Current	0 - 1mA	0 - 5A
Bipolar DC Current	±5mA	±10mA
DC Voltage	0 - 1V	0 - 300V*
Bipolar DC Voltage	±5V	±10V
2 Wire Pot	0 - 125Ω	0 - 1kΩ
3 Wire Pot	0 - 1kΩ	0 - 100kΩ

* Note: For input voltages greater than 60Vdc a Divider unit must be specified.

Thermocouples

Types E,J,K,N,R,S,T,B linearised or non-linearised. Ranges: Wide range of inputs. Cold junction compensation (can be turned off). Upscale or downscale t/c burnout options

Resistance Thermometers

2, 3 or 4 wire PT100 or PT1000, linearised or non-linearised. Ranges: Wide range of inputs. Upscale or downscale RTD burnout options.

For a dual output unit please see the SC-DUALCON data sheet.

Other input types are Strain gauge or load cell and Frequency, including PWM frequency inputs - see SC-FREQCON


Technical Specifications

Parameter	Min	Typ	Max	Comments
Supply Voltage (Vac)	90		264	50 or 60 Hz
VA Rating		1.6VA±10%		20mA in & out
Volt Drop (mA input)		0.3		At 20mA Input
Input Impedance (Volt)		1MΩ	100MΩ	Dependant on range (typ=10V)
Input Impedance (mA)		15Ω		Dependant on range (typ=20mA)
Output Linearity Error		±0.01%	±0.05%	
Temp Coefficient			±50ppm/°C	
Load Resistance Error			±5ppm/Ω	0 < RL < 750Ω
Time Constant (10-90%)	25mS	60mS		Select fast/normal response
Operating Ambient	0°C		55°C	
Relative Humidity	0%		90%	
Isolation Voltage ^{see note}	1kV			
Surge Voltage	2.5kV for 50μS			Transient of 10kV/μS

Notes

Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur. Device is protected against reverse polarity connection.

Accuracy figures based on 24Vdc supply, 4-20mA output with 250Ω load and an ambient 20°C. SC-ISOCON3 does NOT provide safety isolation when the input is connected to the mains.

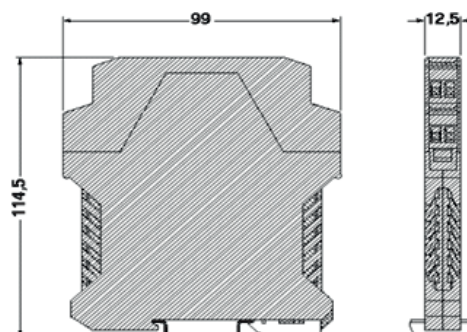

Installation Data

Mounting	DIN Rail TS35
Orientation	Any
Connections	Screw Clamp with pressure plate
Conductor Size	0.5-4.0mm
Insulation Stripping	12mm
Weight	Approx 95g

Ordering Information

Part No.: SC-ISOCON3

